




# HEAVY EQUIPMENT

[www.bigtextrailers.com](http://www.bigtextrailers.com)

## 4XPH

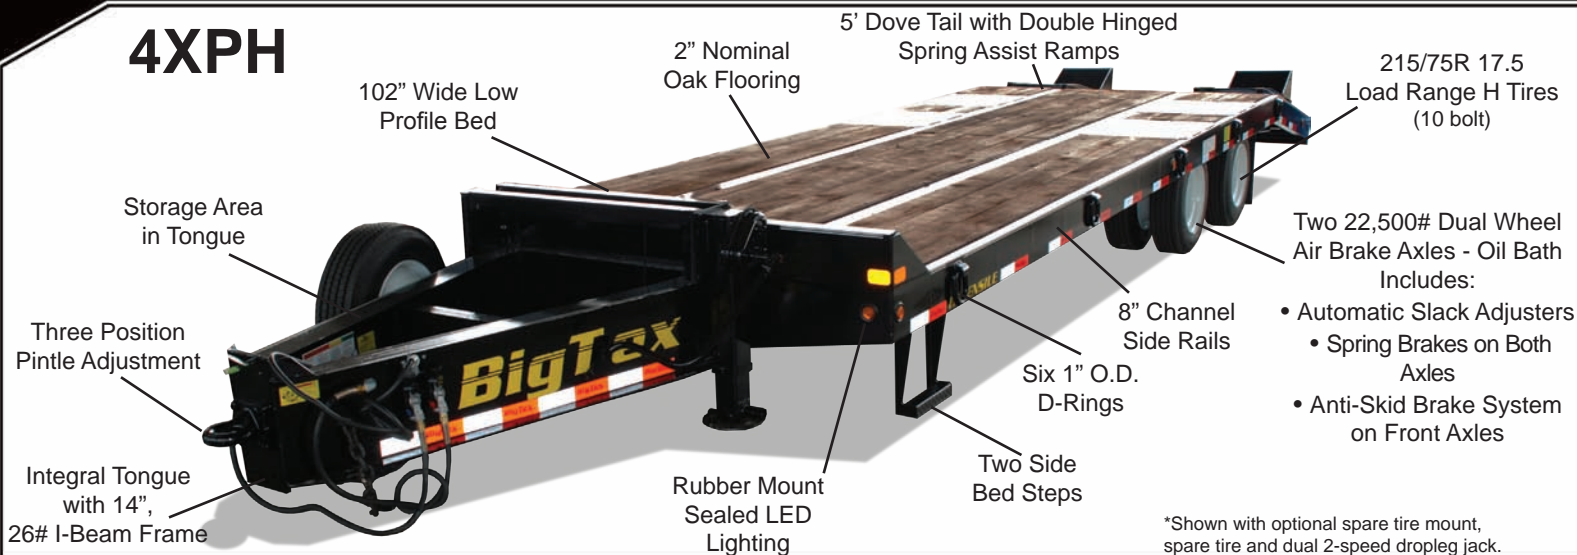

## 60TP



- **Single Axle Pan Tilt Transport Trailer available in 78" width and 12' length**
- **4,200# Approximate Carrying Capacity** • **Adjustable Forged 2-5/16" Coupler**
  - **4" x 2" Square Tubing Tongue** • **2K Swivel Mount Jack**
  - **One Piece 3/16" Steel Pan Tilt Bed with 11 Degree Tilt Angle**
    - **6,000# EZ Lube Torsion Axle with Electric Brake**
  - **16" Tires (8 bolt)** • **Texturized Floor for Increased Traction**
    - **Grommet Mount Sealed Lighting**

## 10EP



- **Tandem Axle Pan Equipment Transport Trailer available in 78" width and lengths of 14' and 16'** • **Approximate Carrying Capacity ranges from 7,400# to 7,550#, depending on length** • **Adjustable Forged 2-5/16" Coupler**
  - **4" x 2" Square Tubing Tongue** • **2K Swivel Mount Jack**
- **One Piece 3/16" Steel Formed Pan** • **Two 5,200# Cambered EZ Lube Axles with Electric Brakes** • **15" Tires (6 bolt)** • **Texturized Floor for Increased Traction**
  - **Grommet Mount Sealed Lighting**
  - **40" Heavy Duty Fold Up Ramps with Expanded Metal**

## 20ED



- **Pintle Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5'** • **Approximate Carrying Capacity ranges from 18,800# to 20,000#, depending on length** • **Integral Tongue with 12", 19# I-Beam Frame**
  - **60K, 3" ID Three Position Pintle Eye** • **12K Top Wind Drop Leg Jack**
- **Low Profile Bed with Oak Flooring** • **Two 10,000# Heavy Duty Dual Wheel Axles - Oil Bath Electric Brakes with Complete Break-A-Way System**
  - **16" Tires (8 bolt)** • **Rubber Mount Sealed LED Lighting**
  - **5' Dove Tail with Double Hinged Spring Assist Ramps**

## 20AD



- **Pintle Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5'** • **Approximate Carrying Capacity ranges from 18,800# to 20,000#, depending on length** • **Integral Tongue with 12", 19# I-Beam Frame**
  - **60K, 3" ID Three Position Pintle Eye** • **12K Top Wind Drop Leg Jack** • **Low Profile Bed with Oak Flooring** • **Two 10,000# Heavy Duty Dual Wheel Axles - Air Brakes with Automatic Slack Adjusters, Spring Brakes and ABS** • **16" Tires (8 bolt)**
    - **Rubber Mount Sealed LED Lighting** • **5' Dove Tail with Double Hinged Spring Assist Ramps**

## 24ED



- **Pintle Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5'** • Approximate Carrying Capacity ranges from 22,800# to 24,000#, depending on length • Integral Tongue with 12", 19# I-Beam Frame
  - 60K, 3" ID Three Position Pintle Eye • 12K Top Wind Drop Leg Jack
- **Low Profile Bed with Oak Flooring** • Two 12,000# Heavy Duty Dual Wheel Axles
  - Oil Bath Electric Brakes with Complete Break-A-Way System
  - 16" Tires, LR-G (8 bolt) • Rubber Mount Sealed LED Lighting
  - 5' Dove Tail with Double Hinged Spring Assist Ramps

## 24AD



- **Pintle Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5'** • Approximate Carrying Capacity ranges from 22,800# to 24,000#, depending on length • Integral Tongue with 12", 19# I-Beam Frame
  - 60K, 3" ID 3 Position Pintle Eye • 12K Top Wind Drop Leg Jack
- **Low Profile Bed with Oak Flooring** • Two 12,000# Heavy Duty Dual Wheel Axles
  - Oil Bath Air Brakes with Automatic Slack Adjusters, Spring Brakes and ABS
  - 16" Tires, LR-G (8 bolt) • Rubber Mount Sealed LED Lighting
  - 5' Dove Tail with Double Hinged Spring Assist Ramps

## 4XPH



\*Shown with optional spare tire mount, spare tire and dual 2-speed dropleg jack.

- **Pintle Heavy Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5'** • Approximate Carrying Capacity ranges from 37,800# to 39,000#, depending on length • Integral Tongue with 14", 26# I-Beam Frame
  - 60K, 3" ID Three Position Pintle Eye • 12K Top Wind Drop Leg Jack
- **Low Profile Bed with Oak Flooring** • Two 22,500# Dual Wheel Axles with Oil Bath - Air Brakes with Automatic Slack Adjusters and Spring Brakes on Both Axles
  - 17.5" Tires (10 bolt budd) • Rubber Mount Sealed LED Lighting
  - 5' Dove Tail with Double Hinged Spring Assist Ramps

## 5XGL



\*Shown with optional deck on neck and plate over tires.

- **Lowboy Heavy Equipment Transport Trailer available in 102" width and 20' length** • 48,000# Approximate Carrying Capacity
  - SAE 2" Kingpin Coupler • 16", 31# I-Beam Neck with Storage Area
  - 16", 31# I-Beam Frame with 12" Channel Side Rails
- **Adjustable Four Position Jack with Landing Legs** • **Low Profile Bed with Oak Flooring** • Two 22,500# Dual Wheel Axles with Heavy Duty Oil Bath - Air Brakes with Automatic Slack Adjusters and Spring Brakes on Both Axles
  - Anti-Skid Brake System on Front Axle • 17.5" Tires (10 bolt budd)
  - Rubber Mount Sealed LED Lighting
  - 3' Dove Tail with Double Hinged Spring Assist Ramps

## 5XPH



\*Shown with optional spare tire mount, spare tire and dual 2-speed dropleg jack.

- **Pintle Heavy Equipment Transport Trailer available in 102" width and in lengths of 24' and 28'** • Approximate Carrying Capacity ranges from 47,100# to 47,600#, depending on length • Integral Tongue with 14", 26# I-Beam Frame
  - 60K, 3" ID 3 Position Pintle Eye • 12K Top Wind Drop Leg Jack
- **Low Profile Bed with Oak Flooring** • Three 22,500# Dual Wheel Axles with Heavy Duty Oil Bath - Air Brakes with Automatic Slack Adjusters and Spring Brakes on Three Axles
  - 17.5" Tires (10 bolt budd) • Rubber Mount Sealed LED Lighting
  - 5' Dove Tail with Double Hinged Spring Assist Ramps

Trailers may be shown with options that are not standard. Carrying Capacities may vary with options. For a complete list of all trailer specifications and features, log on to [www.bigtexttrailers.com](http://www.bigtexttrailers.com).